



Direct Air Type Dhumidifying Dryer




EMDE-10-HD

EMDE-15-HD

EMDE-25-HD

EMDE-25-HD-K

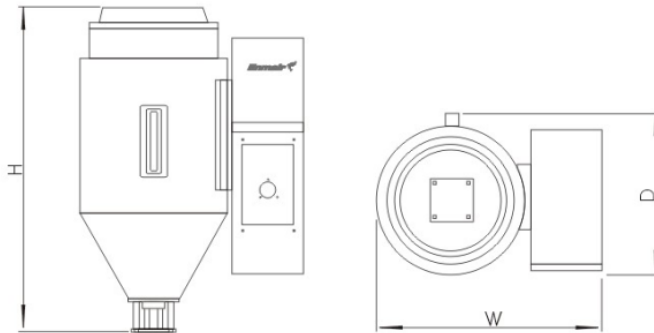

Model EMDE	5-HD	10-HD	15-HD	20-HD	25-HD
Nominal Capacity Flow	0.1 Nm ³ /min	0.15 Nm ³ /min	0.2 Nm ³ /min	0.3 Nm ³ /min	0.3 Nm ³ /min
Nominal Pressure Dew Point	-40°C	-40°C	-40°C	-40°C	-40°C
Specified Work Pressure	0.7MPa	0.7MPa	0.7MPa	0.7MPa	0.7MPa
Maximum Working Pressure	1.0MPa	1.0MPa	1.0MPa	1.0MPa	1.0MPa
Minimum Working Pressure	0.4MPa	0.4MPa	0.4MPa	0.4MPa	0.4MPa
Specified Air Inlet Temperature	35°C	35°C	35°C	35°C	35°C
Maximum Air Inlet Temperature	50°C	50°C	50°C	50°C	50°C
Working Environment Temperature	0 ~ 40°C	0 ~ 40°C	0 ~ 40°C	0 ~ 40°C	0 ~ 40°C
Regeneration Air Consumption Rate	≤ 15%	≤ 15%	≤ 15%	≤ 15%	≤ 15%
Differential Pressure	≤ 0.02MPa	≤ 0.02MPa	≤ 0.02MPa	≤ 0.02MPa	≤ 0.02MPa
Work Power	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz
Protection Level	IP65	IP66	IP67	IP68	IP69
Noise	≤ 75 dB (A)	≤ 75 dB (A)	≤ 75 dB (A)	≤ 75 dB (A)	≤ 75 dB (A)
Material Barrel Capacity (L)	8	15	25	30	40
Heating Power (W)	600	600	800	1500	1500
Dimensions (W*D*H)	480x400x825	520x400x825	570x400x840	580x445x880	620x445x880
Weight (kg)	40	45	50	55	60

Note: We reserve the right to change the specifications without prior notice